

Performance Beast

Durable Strength & Conditioning Surfacing

Made using our patented itsTRU® technology, Performance Beast is a durable 10.5mm vulcanized composition rubber system that absorbs shock. Designed for heavy strength training, Performance Beast maximizes energy restitution and enhances durability in applications dominated by free weight training.

BUILT ON
itsTRU[®]
TECHNOLOGY

Product Attributes

- **2.5mm Vulcanized Composition Rubber (VCR) Surface Layer**
Provides excellent durability and slip resistance
- **8mm Factory-Fusion Bonded VCR Beast Base Layer**
Extremely dense, upcycled VCR minimizes bar bounce and provides ultimate durability

Nominal Dimensions

Available as a standard in rolls. Talk to your local sales rep to determine availability, pricing, minimums, and lead times.




10.5mm (2.5mm + 8mm) x 48" (1.22m)

Applications

- Selectorized Strength
- Free Weights
- Olympic Style Lifting
- Functional Training
- Cardio

Benefits

- Durable
- Sustainable
- Provides substrate protection
- Slip-resistant

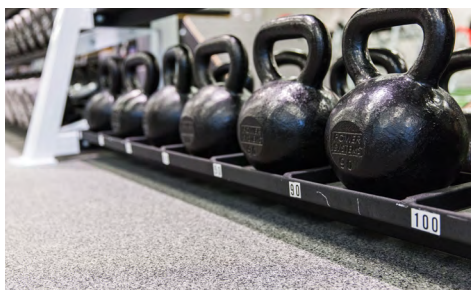


NRG

Force Reduction: 11.4%
Absorption of impact energy


Energy Restitution: 72.2%
Useful return of impact energy

Typical Deltec Field Tester Results


Color Swatches




Medium Gray ES504




Charcoal ES505




Dark Taupe ES506




Warm Gray ES507




Navy ES508




Green ES509



Maroon ES510



Red ES511




Steel Appeal 2 ES15A




Dark Gray ES502




Mocha Latte 2 ES43A




Blue ES500




Blue Jays ES103




Cardinals ES104



Raiders ES503




Buff Blue 20 ES45



Rippin Red 20 ES47




Grippin Gray 20 ES46




Whey Protein 2 ES97A




Rustic Edge ES512




Raw Titanium ES513



Forged Steel ES514



Urban Slate ES515



Jet Black ES00

Technical Details

| Performance Criteria | Test Standard | Typical Results |
|--------------------------------|---------------|-----------------|
| Recovery after Static Load | ASTM F970 | 0.004" |
| Coefficient of Friction | ASTM D2047 | >0.8 |
| FloorScore | CA 01350 | Certified |
| Abrasion Resistance | ASTM D3389 | Pass |
| Flammability- Pill Test | ASTM D2859 | Pass |
| Impact Insulation Class (IIC)* | ASTM E492 | 55 |
| Delta IIC* | ASTM E2179 | 24 |

*Tested on a 6" concrete slab with no ceiling.